# **SECO N 25**

Chain Actuator / 230 V / 250 N



### Chain Actuator / 230 V ac / 250 N

**CONTROLS** 

The SECO N 25 is a compliant Chain Actuator designed to provide precise and reliable operation for Environmental Ventilation applications.

SE Controls manufacture this high-quality 'Made in Britain' actuator with the following features:

- 'Frequency of operation' data logging records every actuator movement
- · Compact design with variable options for stroke length
- Standard finish is RAL 9006, (White Aluminium) but may be customised to suit installation requirements
- Standard flex length is 2 m but this can be modified to suit installation requirements
- Extensive range of brackets to suit a variety of window systems
- · Quiet operation with configurable speed control

### Orientation





Bottom Hung



Top Hung



Side Hung



Centre Pivot

### **Accreditations**





### **Application**




**Environmental Ventilation** 




Voltage to 230 V chain actuators must be switched off after each operation with a rest period required between cycles.

# **Technical Drawing**

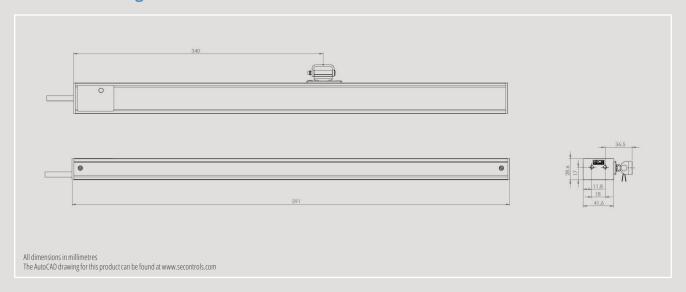

# **Standard Bracket Detail**



### **Bracket Product Codes**

	Height (mm)		
Offset (mm)	35	40	50
0	AKS18000001	AKS18000002	AKS18000003
5	AKS18050001	AKS18050002	AKS18050003
8	AKS18080001	AKS18080002	AKS18080003
10	AKS18100001	AKS18100002	AKS18100003
15	AKS18150001	AKS18150002	AKS18150003
20	N/A	N/A	AKS18200003

### **Technical Data**

Actuator	SECO N 25	
Actuator Type	Chain Actuator	
Voltage (all ± 6%)	230 V dc	
Amp Draw Current	<0.12 A	
Stroke	20 mm -250 mm, 20 mm -350 mm (Configurable)	
Operating Speed	5mm/sec (configurable) 3mm/sec (option single application only)	
Ambient Operating Temp	-5°C to +60°C	
Thrust Force	250 N	
Close Force	250 N	
Clamping Force	4000 N	
Soft Close	Yes	
Switching	Electronic	
Seal Relief	Programmable up to 20 mm	
Synchronisation	Optional	
Standard Finish Powder Coated	RAL 9006 (White Aluminium)	
Colour Option	Other RAL colours available on request	
Flex Length	2 m	
Flex Type	4 core PVC	
Flex Colour	Grey	
Duty Cycle	22% (2 mins on, 7 mins off)	
IP Rating	IP20	
Product Warranty	15,000 cycles, or 12 months <sup>1</sup>	
Bracket	Face fix, Through body, Pivot	
Application	Environmental Ventilation	
<sup>1</sup> Commercial terms for each project will supersede this warranty information		

<sup>1</sup> Commercial terms for each project will supersede this warranty information

# **Product Codes**

White Aluminium (RAL 9006)	Operating Voltage	Force	Stroke
DAS0250250S	230 V ac	250 N	250 mm
DAS0250350S	230 V ac	250 N	350 mm